

## Switch Amplifier KFD2-SH-Ex1

- 1-channel isolated barrier
- 24 V DC supply (Power Rail)
- Input for approved dry contacts or SN/S1N sensors
- Relay contact output
- Fault indication output
- Line fault detection (LFD)
- Up to SIL 3 acc. to IEC/EN 61508
- Up to PL d acc. to EN/ISO 13849



**SIL 3**

PL d



### Function

This isolated barrier is used for intrinsic safety applications.

The device transfers digital signals (SN/S1N proximity sensors or approved dry contacts) from a hazardous area to a safe area.

The input controls one relay contact output with 3 NO contacts (one output is in series to the both output relays for the safety function), one relay contact output with one NO contact, and one passive transistor output.


Unlike an SN/S1N series proximity sensor, a mechanical contact, requires a 10 kΩ resistor to be placed across the contact in addition to a 1.5 kΩ resistor in series.

Lead breakage (LB) and short circuit (SC) conditions of the control circuit are continuously monitored.

During an fault condition, the fault indication output energizes and outputs I and II de-energize.

For safety applications up to SIL3, output I must be used. For safety applications up to SIL2, output I and output II can be used.

### Connection

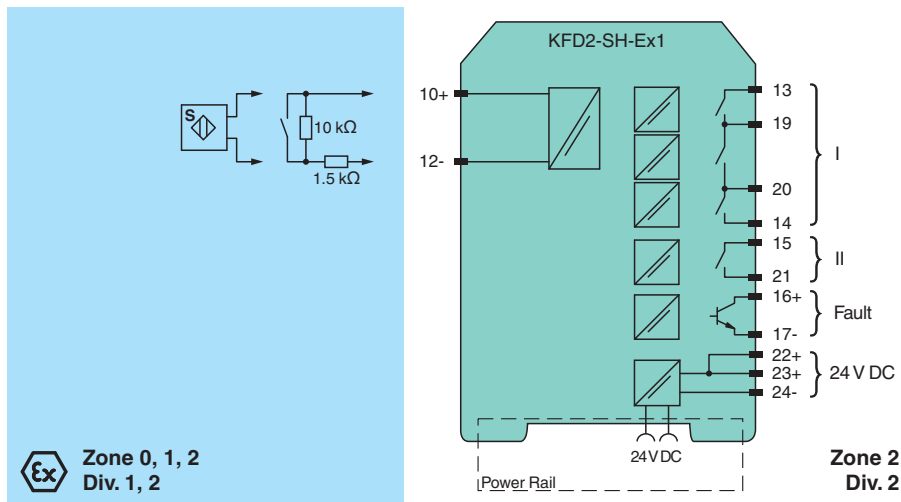

### Technical Data

General specifications		
Signal type		Digital Input
Functional safety related parameters		
Safety Integrity Level (SIL)		SIL 3
Performance level (PL)		PL d
Supply		
Connection		Power Rail or terminals 22+, 23+, 24-
Rated voltage	U <sub>r</sub>	20 ... 35 V DC

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0002  
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222  
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
pa-info@sg.pepperl-fuchs.com

**PEPPERL+FUCHS**

## Technical Data

Ripple		≤ 10 %
Rated current	$I_r$	≤ 130 mA
Power dissipation		2.1 W
Power consumption		max. 2.3 W
<b>Input</b>		
Connection side		field side
Connection		terminals 10+, 12-
Open circuit voltage/short-circuit current		approx. 8.4 V DC / approx. 11.7 mA
Lead resistance		≤ 50 Ω, in hazardous area cable capacitances and inductivities are to be taken into account
Switching point		
Relay de-energized		$I < 2.1 \text{ mA}$ and $I > 5.9 \text{ mA}$
Relay energized		$2.8 \text{ mA} < I < 5.3 \text{ mA}$
Response delay		≤ 1 ms
<b>Output</b>		
Connection side		control side
Connection		output I: terminals 13, 14 ; output II: terminals 15, 21 ; output III: terminals 16+, 17-
Output I		relay , signal
Contact loading		50 V AC/1 A/cos φ > 0.7; 24 V DC/1 A resistive load
Mechanical life		50 x 10 <sup>6</sup> switching cycles
Output II		relay , signal
Contact loading		50 V AC/1 A/cos φ > 0.7; 24 V DC/1 A resistive load
Mechanical life		50 x 10 <sup>6</sup> switching cycles
Output III		electronic output, passive , fault signal
Rated voltage		10 ... 30 V DC
Signal level		1-signal: (L+) -2.5 V (7 mA, short-circuit proof) / 0-signal: blocked output (Leakage current ≤ 10 μA)
<b>Transfer characteristics</b>		
Switching frequency		5 Hz
<b>Galvanic isolation</b>		
Output/power supply		reinforced insulation according to IEC/EN 61010-1, rated insulation voltage 300 V <sub>eff</sub>
Mutual output I, II, III		basic insulation according to IEC/EN 61010-1, rated insulation voltage 50 V <sub>eff</sub>
<b>Indicators/settings</b>		
Display elements		LEDs
Labeling		space for labeling at the front
<b>Directive conformity</b>		
Electromagnetic compatibility		
Directive 2014/30/EU		EN 61326-1:2013 (industrial locations)
Machinery Directive		
Directive 2006/42/EC		EN/ISO 13849-1:2015
<b>Conformity</b>		
Electromagnetic compatibility		NE 21:2011
Degree of protection		IEC 60529:2001
Safety		IEC/EN 61508:2010
<b>Ambient conditions</b>		
Ambient temperature		-20 ... 60 °C (-4 ... 140 °F)
<b>Mechanical specifications</b>		
Degree of protection		IP20
Connection		screw terminals
Mass		approx. 280 g
Dimensions		40 x 107 x 115 mm (1.6 x 4.2 x 4.5 inch) (W x H x D) , housing type C1
Mounting		on 35 mm DIN mounting rail acc. to EN 60715:2001
<b>Data for application in connection with hazardous areas</b>		
EU-type examination certificate		PTB 00 ATEX 2042


Release date: 2021-11-25 Date of issue: 2021-11-25 Filename: 046903\_eng.pdf

## Technical Data







Marking		Ⓔ II (1)GD [EEx ia] IIC [circuit(s) in zone 0/1/2]
Input		EEx ia IIC
Voltage	U <sub>o</sub>	9.56 V
Current	I <sub>o</sub>	16.8 mA
Power	P <sub>o</sub>	41 mW (linear characteristic)
Supply		
Maximum safe voltage	U <sub>m</sub>	40 V AC/DC (Attention! The rated voltage can be lower.)
Output		
Maximum safe voltage	U <sub>m</sub>	output I/output II: 253 V AC/DC (Attention! U <sub>m</sub> is no rated voltage.) output III: 60 V AC/DC (Attention! U <sub>m</sub> is no rated voltage.)
Certificate		TÜV 99 ATEX 1493 X
Marking		Ⓔ II 3G Ex ec nC IIC T4 Gc
Galvanic isolation		
Input/Output		safe electrical isolation acc. to IEC/EN 60079-11, voltage peak value 375 V
Input/power supply		safe electrical isolation acc. to IEC/EN 60079-11, voltage peak value 375 V
Directive conformity		
Directive 2014/34/EU		EN IEC 60079-0:2018 , EN 60079-7:2015+A1:2018 , EN 60079-11:2012 , EN IEC 60079-15:2019
<b>International approvals</b>		
FM approval		
Control drawing		116-0158
IECEX approval		
IECEX certificate		IECEX TUN 19.0013X
IECEX marking		Ex ec nC IIC T4 Gc
<b>General information</b>		
Supplementary information		Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see <a href="http://www.pepperl-fuchs.com">www.pepperl-fuchs.com</a> .

## Assembly

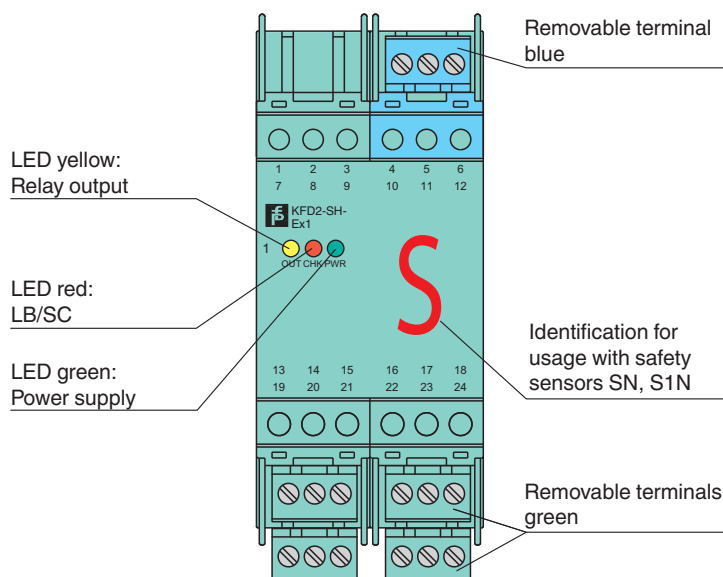


### Front view



## Matching System Components

	<b>KFD2-EB2</b>	Power Feed Module
	<b>UPR-03</b>	Universal Power Rail with end caps and cover, 3 conductors, length: 2 m
	<b>UPR-03-M</b>	Universal Power Rail with end caps and cover, 3 conductors, length: 1,6 m
	<b>UPR-03-S</b>	Universal Power Rail with end caps and cover, 3 conductors, length: 0.8 m
	<b>K-DUCT-BU</b>	Profile rail, wiring comb field side, blue
	<b>K-DUCT-BU-UPR-03</b>	Profile rail with UPR-03- * insert, 3 conductors, wiring comb field side, blue

## Accessories

	<b>KF-ST-5GN</b>	Terminal block for KF modules, 3-pin screw terminal, green
	<b>KF-ST-5BU</b>	Terminal block for KF modules, 3-pin screw terminal, blue
	<b>KF-CP</b>	Red coding pins, packaging unit: 20 x 6

## Application

The input (terminals 10, 12) may generally be operated only with **potentially free** (passive) switches.

Single channel operations up to SIL3 **must** occur via terminals 13 and 14. The center tap of the contacts (terminals 19, 20) can **also** be used if an operation is to occur a redundant branch.

If the device is used for safety operations the information in the test documents should be observed. The output III error message delivers a "1"-signal when the control circuit experiences lead breakage (LB) or a short circuit (LK).

The device has removable terminals.

## Characteristic Curve

### Maximal switching power of the output

